



PUR-HX

Structure:

Polyether-Polyurethane

Characteristics:

Very smooth bore, excellent abrasion resistance, resistant to oil and petrol, non toxic, free of halogen and softeners, resistant to hydrolysis and microbes, ECO friendly

Acc. to TRGS 727 and ATEX 2014/34 EU, with earthing at both ends of the spiral for non- flammable dusts and bulks solids in Zone 22. Gases and liquids with low conductivity of electrostatic charges in Zone 2


Applications:

Suction and conveying of abrasive particles and granules

Temperature Resistance: -40°C up to +100°C (short term upto +125°C)

Colour:


Transparent

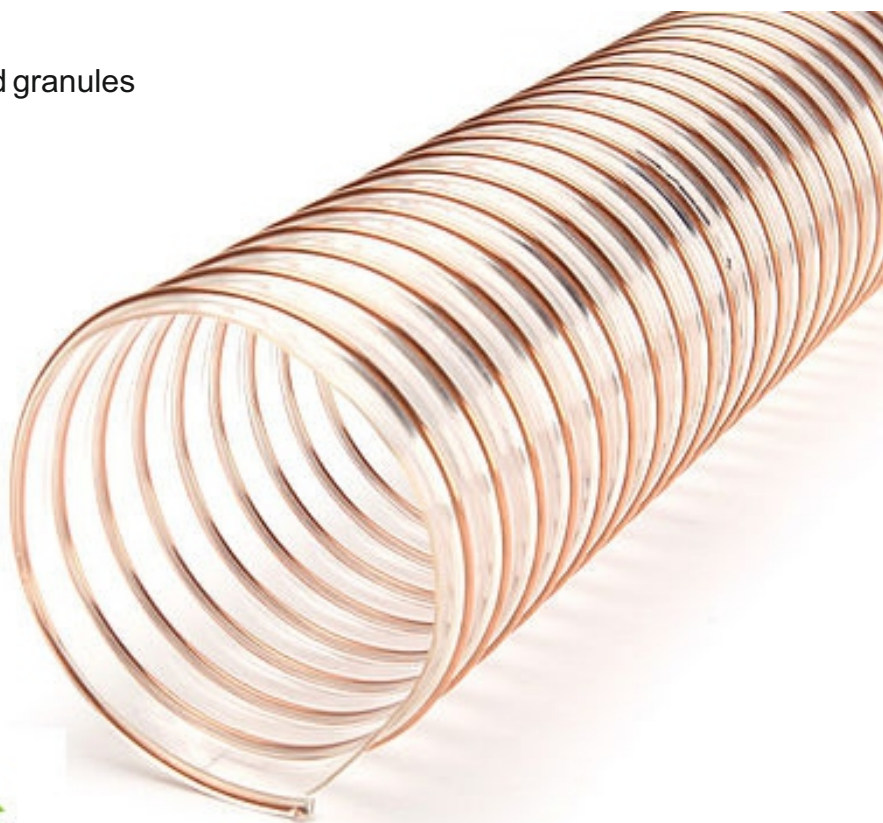

PUR-HX

Technical Properties

TYPES	PUR-HX
Wall	100% Polyuretane
Abrasion Resistance (ISO 4649)	30 mm ³
Thickness(between the wire)	2.5mm
Working Temperature	-40 °C / +100 °C 125°C for short time

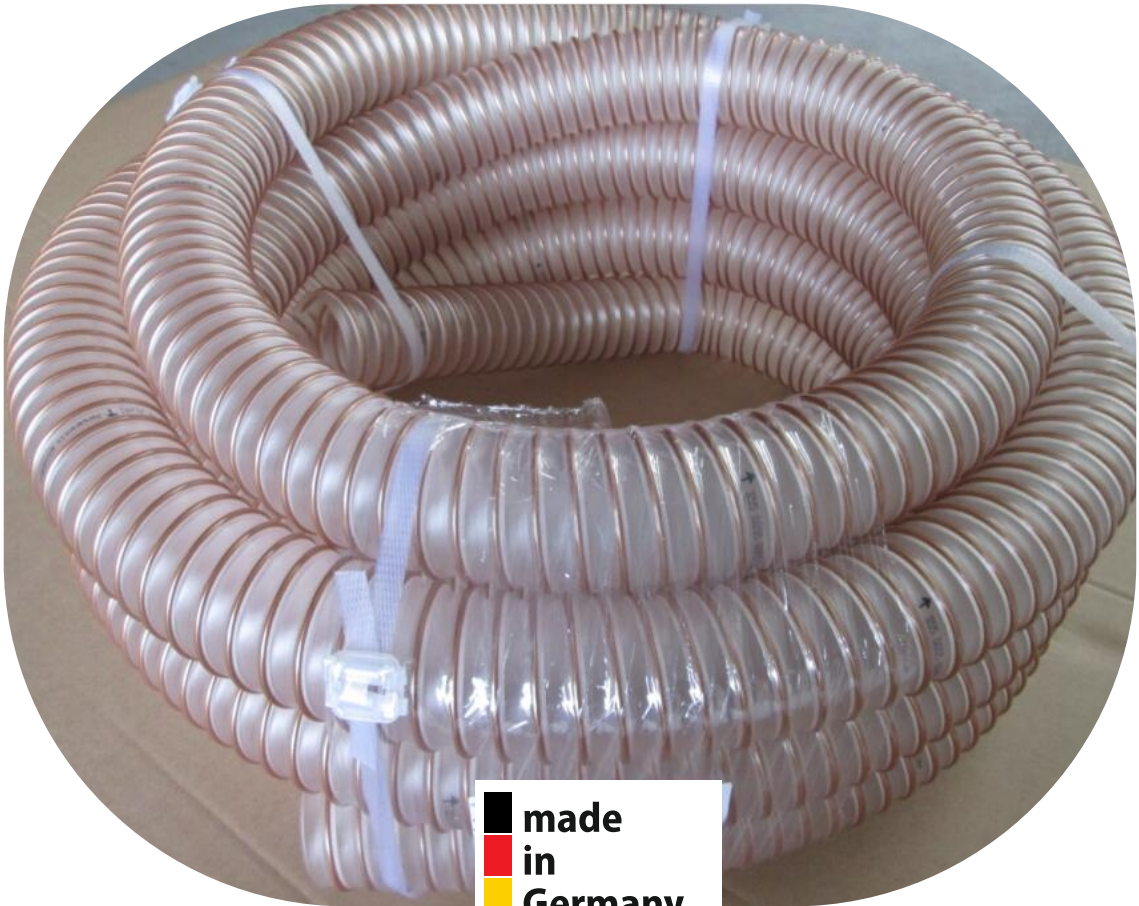

 made
in
Germany

Item Code	ID	Vacuum	Pressure	Std Length	Price
	mm	bar	bar	mtr	Per Mtr
PURHX-112	40	0.81	3.33	20	2250.00
PURHX-45	45	0.81	3.14	20	2300.00
PURHX-2	51	0.81	3.09	20	2400.00
PURHX-212	63	0.81	3.04	20	3100.00
PURHX-3	76	0.76	2.38	20	3700.00
PURHX-4	102	0.67	1.57	15	5700.00