



Valves & Faucets


VALVES | BRASS



RN FORGED BRASS BALL VALVE, BRASS FINISH ART NO. 1710

SALIENT FEATURES:

Screwed Female Ends to IS 554/BS 21/ISO 7
Full Bore, Two Piece Design
Quarter Turn, Lever Operated
Provided with Forged Brass Hard Chrome Plated Ball
Premium Quality PTFE Gland Packing and Seating
Stainless Steel (Powder coated), Non-Magnetic Handle
Test Pressure (Hydrostatic): 40kg/cm²
Maximum Working Temperature: 220°C

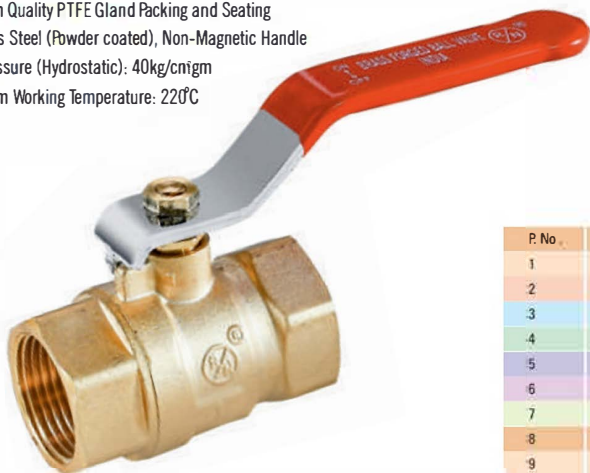

Size	Qty/cn	Price in Rs.
1/4"(8mm)	200	298
3/8"(10mm)	200	298
1/2"(15mm)	120	474
3/4"(20mm)	84	665
1"(25mm)	60	971
1-1/4"(32mm)	36	1362
1-1/2"(40mm)	24	2030
2"(50mm)	18	3180
2-1/2"(65mm)	8	6100
3"(80mm)	6	8178
4"(100mm)	4	15320

P. No.	Name of Part	Material of Construction	Specification	Quantity
1	Body	Forged Brass	IS 6912 Gr. FLB	1
2	Bonnet	Forged Brass	IS 6912 Gr. FLB	1
3	Ball	Forged Brass (Hard Chrome Plated)	IS 6912 Gr. FLB	1
4	Body Seat Ring	PTFE	BS EN 12086 - 1	2
5	Thrust Washer	PTFE	BS EN 12086 - 1	1
6	Gland Packing	PTFE	BS EN 12086 - 1	1
7	Stem	Forged Brass	IS 6912 Gr. FLB	1
8	Gland	Forged Brass	IS 6912 Gr. FLB	1
9	Lever	Mild Steel (Chrome Plated)	ASTM A 194 Gr. 2H	1
10	Nut	Brass	IS 6912 Gr. FLB	1



Valves & Faucets

VALVES | BRASS



RN FORGED BRASS BALL VALVE, NICKEL PLATED ART NO. 1750

SALIENT FEATURES:

Screwed Female Ends to IS 554/BS21/ISO 7
Full Bore, Two Piece Design
Quarter Turn, Lever Operated
Provided with Forged Brass Hard Chrome Plated Ball
Premium Quality PTFE Gland Packing and Seating
Test Pressure (Hydrostatic): 40kg/cm²
Maximum Working Temperature: 220 C



Size	Qty/cn	Price in Rs.
1/4"(8mm)	200	302
3/8"(10mm)	200	302
1/2"(15mm)	160	474
3/4"(20mm)	120	665
1"(25mm)		971

P. No.	Name of Part	Material of Construction	Specification	Quantity
1	Body	Forged Brass (Chrome Plated)	IS 6912 Gr. FLB	1
2	Bonnet	Forged Brass	IS 6912 Gr. FLB	1
3	Ball	Forged Brass (Hard Chrome Plated)	IS 6912 Gr. FLB	1
4	Body Seat Ring	PTFE	BS EN 12086 - 1	2
5	Thrust Washer	PTFE	BS EN 12086 - 1	1
6	Gland Packing	PTFE	BS EN 12086 -1	1
7	Stem	Forged Brass	IS 6912 Gr. FLB	1
8	Gland	Forged Brass	IS 6912 Gr. FLB	1
9	Lever (Butterfly Handle)	Aluminium	EN 1706 LM6	1
10	Nut	Brass (Chrome Plated)	IS 6912 Gr. FLB	1

RN FORGED BRASS NOZZLE VALVE, NICKEL PLATED ART NO. 1400G

SALIENT FEATURES:

Screwed Male & Female Ends to IS 554/BS 21/ISO 7
Full Bore, Two Piece Design
Quarter Turn, Lever Operated
Provided with Forged Brass Hard Chrome Plated ball
Premium Quality PTFE Gland Packing and Seating
Test Pressure (Hydrostatic): 40kg/cm² gm
Maximum Working Temperature: 220 C



Size	Qty/cn	Price in Rs.
1/4"(8mm)	200	260
3/8"(10mm)	200	260
1/2"(15mm)	200	274

P. No.	Name of Part	Material of Construction	Specification	Quantity
1	Body	Forged Brass (Chrome Plated)	IS 6912 Gr. FLB	1
2	Bonnet	Forged Brass	IS 6912 Gr. FLB	1
3	Ball	Forged Brass (Hard Chrome Plated)	IS 6912 Gr. FLB	1
4	Body Seat Ring	PTFE	BS EN 12086 - 1	2
5	Thrust Washer	PTFE	BS EN 12086 - 1	1
6	Gland Packing	PTFE	BS EN 12086 - 1	-
7	Stem	Forged Brass	IS 6912 Gr. FLB	1
8	Gland	Forged Brass	IS 6912 Gr. FLB	1
9	Lever	Aluminium	EN 1706 LMS	1
10	Screw	S.S. 304	ASTM A 194 Gr. 2H	1

RN FORGED BRASS Y-STRAINER, WITH S.S. 304 FILTER ART NO. 2300Y

SALIENT FEATURES:

Screwed Female Ends to IS 554/BS 21/ISO 7
Full Bore, Two Piece Design
Y Pattern Forged Brass Disc
Test Pressure (Hydrostatic): 40kg/cm² gm
Maximum Working Temperature: 220 C



Size	Qty/cn	Price in Rs.
1/2"(15mm)	240	397
3/4"(20mm)	144	540
1"(25mm)	120	774
1-1/4"(32mm)	60	1162
1-1/2"(40mm)	36	1421
2"(50mm)	24	1846

P. No.	Name of Part	Material of Construction	Specification	Quantity
1	Body	Forged Brass	IS 6912 Gr. FLB	1
2	Bonnet	Forged Brass	IS 6912 Gr. FLB	1
3	Filter	S.S. 304	ASTM A 194 Gr. 2H	1